

acoustic®

B115C and B410C

OWNER'S MANUAL

**MISSING
OR
DAMAGED
PARTS?**

HAVE QUESTIONS?

**CALL
855-272-1090
TOLL FREE**

**— HAVE —
ASSEMBLY
QUESTIONS?**

OR VISIT OUR WEBSITE AT: ACOUSTICAMPLIFICATION.COM



B115C
350 WATT
1X15" BASS SPEAKER CABINET



B410C
400 WATT
4X10" BASS SPEAKER CABINET

3 **Three Year Limited Warranty:** Subject to the limitations set forth below, Acoustic® hereby represents and warrants that the components of this product shall be free from defects in workmanship and materials, including implied warranties of merchantability or fitness for a particular purpose, subject to normal use and service, for three (3) years to the original owner from the date of purchase.

Retailer and manufacturer shall not be liable for damages based upon inconvenience, loss of use of product, loss of time, interrupted operation or commercial loss or any other incidental or consequential damages including but not limited to lost profits, downtime, goodwill, damage to or replacement of equipment and property, and any costs of recovering, reprogramming, or reproducing any program or data stored in equipment that is used with Acoustic® products. This guarantee gives you specific

legal rights. You may have other legal rights which vary from state to state. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.

The information contained herein is correct at the time of publication; yet, due to continuing improvement and development, Acoustic® reserves the right to alter specifications without prior notice.

Acoustic
P.O. Box 5111
Thousand Oaks, CA
91359-5111


All trademarks and registered trademarks mentioned herein are recognized as the property of their respective holders.

1805 - 18311085

www.acousticamplification.com

MODEL	B115C
Power Handling (RMS)	350 Watts RMS
Speakers	1 X 15" custom ferrite drivers
Hi-Frequency Driver	Piezo horn, switchable
Frequency Response	35Hz -15kHz
Max SPL	130dB (half-space measurement)
Inputs	Dual 1/4" (parallel), Combo Locking Speaker Jack
Impedance	8 Ohms
Handles	Retractable spring-loaded (side)
Caster Sockets	Yes
Port	Rear Facing
Dimensions (LxWxH)	24" x 16.1" x 24.3"/61.1cm x 41cm x 59.6cm
Weight	55.4 lbs/25 kg

MODEL	B410C
Power Handling (RMS)	400 Watts RMS
Speakers	4 X 10" custom ferrite drivers
Hi-Frequency Driver	Piezo horn, switchable
Frequency Response	40Hz -16kHz
Max SPL	130dB (half-space measurement)
Inputs	Dual 1/4" (parallel), Combo Locking Speaker Jack
Impedance	8 Ohms
Handles	Retractable spring-loaded (side)
Caster Sockets	Yes
Port	Front Facing Shelf
Dimensions (LxWxH)	24" x 16.1" x 27"/61.1cm x 41cm x 68.5cm
Weight	64 lbs/29 kg

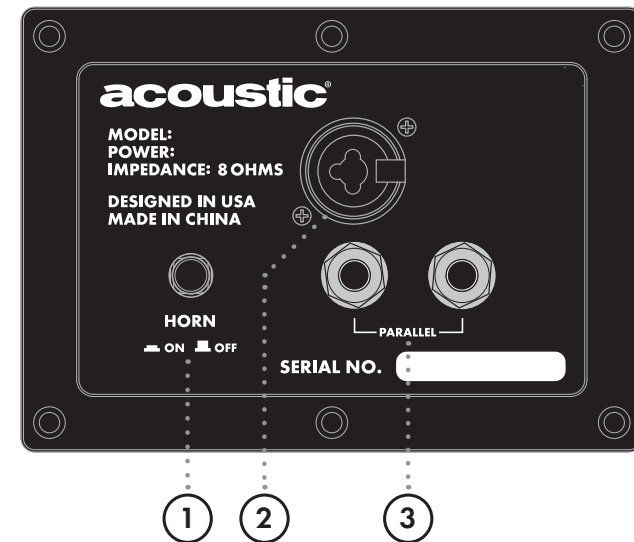

1. Horn On/Off Switch: In the "down" position, this engages the piezo horn.
2. Combo Locking Speaker Connector Jack: Connects your amplifier head to the speaker cabinet via locking connector or 1/4" speaker connector.
3. Parallel 1/4" Speaker Jacks:
 - a. These jacks can output to a second or third speaker cabinet in parallel mode* if the Combo Locking Speaker Connector jack is used for your signal input.
 - b. If you're not using the Combo Locking Speaker Connector jack, either of these jacks can be used to input your amplified signal while the other jack can then be used as an output to connect to a second speaker.

*Please note: when running in parallel mode the speakers combined ohm load should not go below your amplifier head's minimum ohm rating. For example, please refer to the table below.

No. of Cabs & Ohm Rating	Final Load presented to Amplifier
2 x 16 ohm cabs	8 ohms
2 x 8 ohm cabs	4 ohms
2 x 4 ohm cabs	2 ohms

We do not recommend combining speaker cabinets with differing ohm ratings.